aquarius[™] genesis film coating systems

description

Aquarius[™] Genesis film coating systems are designed for application at up to 35% solids, which can significantly increase productivity of continuous or traditional batchbased coating equipment. Aquarius[™] Genesis film coating systems are formulated to provide a strong film with high adhesion and smooth appearance.


key features and benefits

Aquarius[™] Genesis film coating systems are applied to immediate-release dosage forms and provide the following benefits:

- **higher solids:** film coating applied at up to 35% solids with typical viscosities in the 100-300 mPa·s range.
- faster processing times: up to 65% reduction in coating processing time, increased manufacturing capacity in existing equipment, lower capital investment of new coating lines, and lower energy cost.
- lower processing temperatures: provides protection to heat-sensitive APIs or to tablet formulations with dissolution characteristics negatively affected by normal (higher) aqueous coating process temperatures.
- **improved coverage:** enables lower weight loadings that can result in reduced raw material cost.
- non-tacky coating system: prevents surfaceto-surface interactions known to be problematic during product packaging.




figure 1: Even at high solids levels up to 35% w/w, the viscosity of the formulation remains low, allowing faster spray rates to help achieve higher coating efficiency.

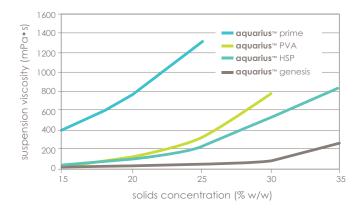





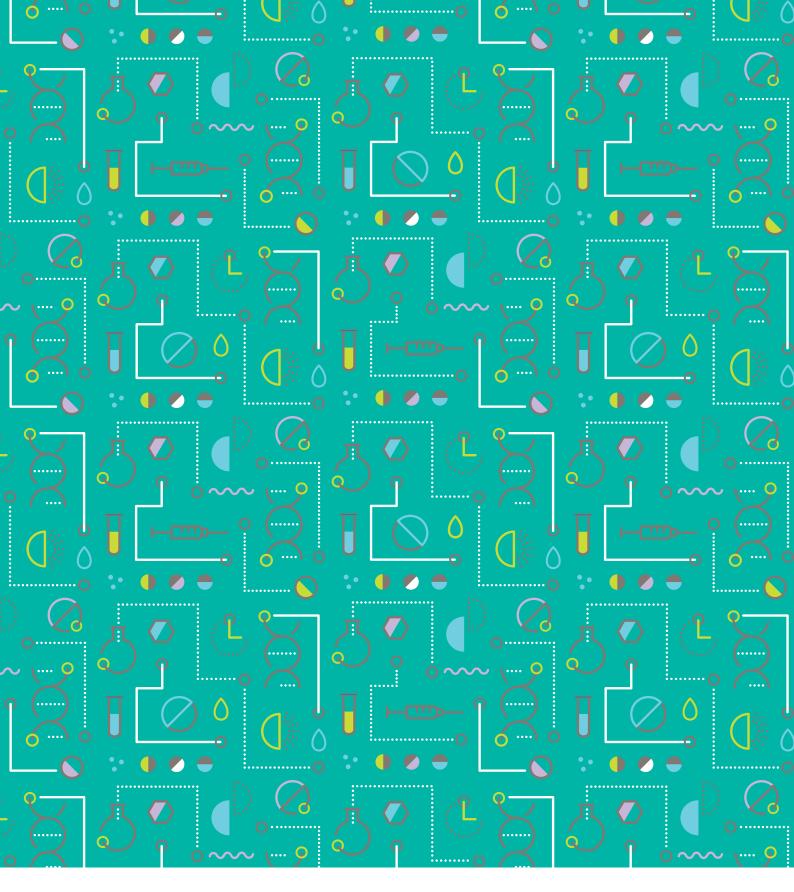

regional centers

North America Wilmington, DE USA Tel: +1 877 546 2782

Europe Switzerland Tel: +41 52 560 55 00

India Maharashtra Tel: +91 22 61489696

Asia Pacific Singapore Tel: +65 6775 5366

Middle East, Africa

Istanbul, Turkey Tel: +00 90 216 538 08 00

Latin America Mexico Tel: +52 55 52 76 6121

ashland.com/contact

- Registered trademark, Ashland or its subsidiaries, registered in various countries
- ™ Trademark, Ashland or its subsidiaries, registered in various countries
- © 2019, Ashland / PHA19-001.1

The information contained in this brochure and the various products described are intended for use only by persons having technical skill and at their own discretion and risk after they have performed necessary technical investigations, tests and evaluations of the products and their uses. Certain end uses of these products may be regulated pursuant to rules or regulations governing medical devices, drug uses, or pesticidal or antimicrobial uses. It is the end user's responsibility to determine the applicability of such regulations to its products.

All statements, information, and data presented herein are believed to be accurate and reliable, but are not to be taken as a guarantee of fitness for a particular purpose, or representation, express or implied, for which seller assumes legal responsibility. No freedom to use any patent owned by Ashland, its subsidiaries, or its suppliers is to be inferred.

